

delta

500 LDR

delta



www.ilapak.com



PACKAGING MACHINERY

TECHNICAL SPECIFICATIONS


Machine speed	Up to 30 cycles per minute in normal use Can be up to 40 cycles, depends on film and product characteristics.
Product dimensions	
LENGTH	Up to 1200 mm - 47", variable bag length Up to 900 mm - 34,5", fixed bag length
WIDTH	300 mm - 12" (jaws 345 mm - 13.6")
HEIGHT	Up to 200 mm - 8.0" standard
Film cut-off	Min 100 mm - 4" / Max 1000 mm - 39,5", fixed bag length Depending on film and product characteristics.
Wrapping materials	Shrink barrier films, laminated, co-extruded and all sealable films.
Film reel dimensions	
CORE Ø	76,2 mm - 3" standard 152,4 mm - 6" on request
OUTER Ø	350 mm - 13.8" standard
WIDTH	800 mm - 31.5" standard 900 mm - 35.4" on request
Film reel max weight	Depending on film reel width, up to 75 kg - 165 lbs
Electronic platform	Industrial PC For USA & Canada, in particular, Allen Bradley platform available.
Power requirement	From 220 to 480 V, 50/60 Hz, 5 kVA
Compressed air	6 bar, 200 l/min
Machine weight	1100 Kg - 2400 lbs

MAIN STANDARD FEATURES

- Inverted machine with long-dwell sealing head.
- 3 AC motors to control film/rollers, jaws head carriage and single belt indexer
- User friendly operator interface with intuitive icons on 6" colour VGA touch screen.
- 64 programs (additional memory on request).
- Automatic product size change.
- Integrated temperature control.
- Electronic diagnostics on-board.
- No product / No bag.
- Misplaced product detection system.
- Ports for peripheral units (printer, labelers, gas control, etc.).
- Programming via AT compatible keyboard.
- Adjustable folding box.
- Automatic sealing rollers height adjustment.
- Single film reel mounting with self-centering cones, right hand machine version, 3 m long infeed, standard.
- Robust, hygienic, easy to clean design, stainless steel finishing standard.

Please discuss your needs with our local representative to configure this machine to your product's specific requirements.

ILPAK is ISO 9001:2000 certified.

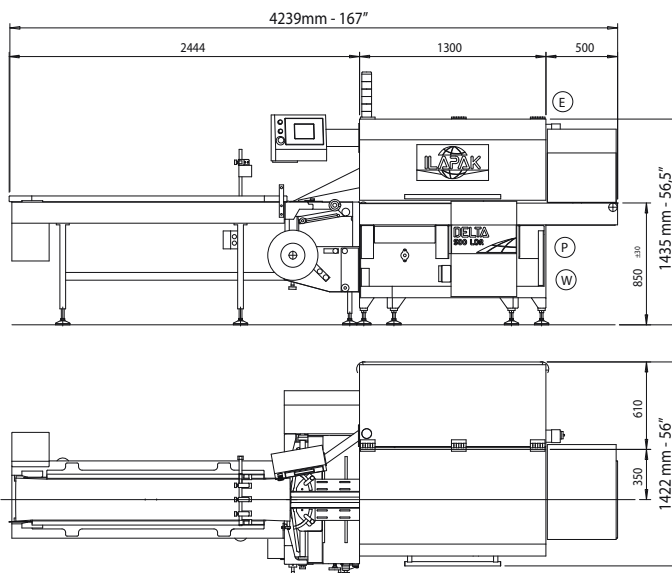

All measurements not specified in inches are given in millimeters.

These specifications are not binding. We reserve the right to change them without prior notice.